


FIREFLY RACK - PANEL DRILL TEMPLATE (18 HP)

Eurorack 3U blank, 18 HP: 91.4 x 128.5 mm . tape this to the blank, punch, drill

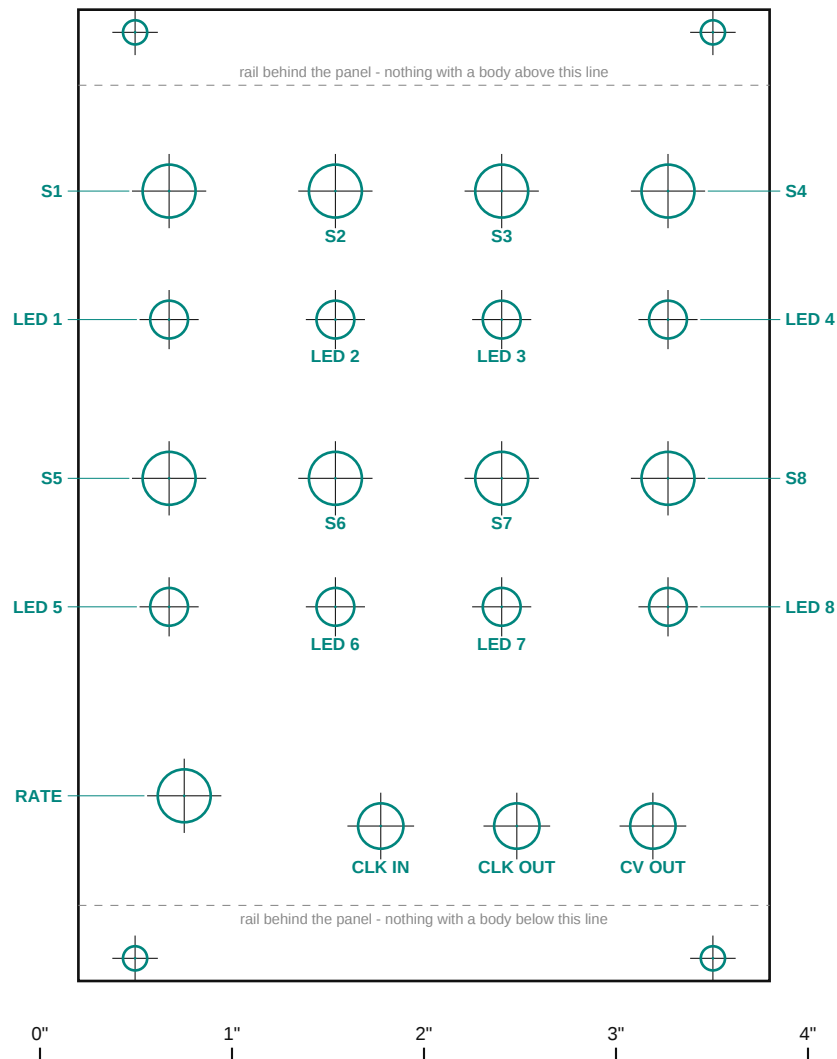

**SCALE CHECK - this bar must measure EXACTLY 4 inches (101.6 mm).
Print at 100% / "Actual size", never "Fit to page."**

Holes: pot 7.0 mm, jack 6.0 mm, LED 5.0 mm; mounting 3.2 mm, 3 mm in from top and bottom, 7.5 mm in from the sides.

Eight steps in two rows of four with each step's LED under its pot; rate at the bottom left, the three jacks along the bottom. CLK IN is a switched jack: its switch contact takes CLK_N.

Nobody has drilled this one yet - the holes are the module's pads, where they sit is this format applied to them.

messopedals.com/diy . the panel should measure 91.4 x 128.5 mm